

SFF specifications are available at <http://www.snia.org/sff/specifications>
or <ftp://ftp.seagate.com/sff>

This specification was developed by the SFF Committee prior to it becoming the SFF TA (Technology Affiliate) TWG (Technical Working Group) of SNIA (Storage Networking Industry Association).

The information below should be used instead of the equivalent herein.

POINTS OF CONTACT:

Chairman SFF TA TWG
Email: SFF-Chair@snia.org

If you are interested in participating in the activities of the SFF TWG, the membership application can be found at:

<http://www.snia.org/sff/join>

The complete list of SFF Specifications which have been completed or are currently being worked on can be found at:

<http://www.snia.org/sff/specifications/SFF-8000.TXT>

The operations which complement the SNIA's TWG Policies & Procedures to guide the SFF TWG can be found at:

<http://www.snia.org/sff/specifications/SFF-8032.PDF>

Suggestions for improvement of this specification will be welcome, they should be submitted to:

<http://www.snia.org/feedback>

SFF Committee documentation may be purchased in electronic form.
SFF specifications are available at <ftp://ftp.seagate.com/sff>

SFF Committee

SFF-8680

Specification for

Serial Attachment 2X 12 Gb/s Unshielded Connector

Rev 2.1 May 8, 2015

Secretariat: SFF Committee

Abstract: This specification defines an Unshielded 2X Input/Output connector for serial interface unshielded devices, backplanes and cables. There are multiple generations of this connector based on performance.

6 Gb/s SFF-8678
12 Gb/s SFF-8680

Connectors compliant to SFF-8680 are also compliant to SFF-8678 but the reverse is not necessarily true.

This specification provides a common reference for systems manufacturers, system integrators, and suppliers. This is an internal working specification of the SFF Committee, an industry ad hoc group.

This specification is made available for public review, and written comments are solicited from readers. Comments received by the members will be considered for inclusion in future revisions of this specification.

The description of a connector in this specification does not assure that the specific component is actually available from connector suppliers. If such a connector is supplied it must comply with this specification to achieve interoperability between suppliers.

Support: This specification is supported by the identified member companies of the SFF Committee.

POINTS OF CONTACT:

Jay Neer
Industry Standards Manager
Molex
2222 Wellington Court
Lisle, IL 60532

I. Dal Allan
Chairman SFF Committee
14426 Black Walnut Court
Saratoga, CA 95070

561-447-2907
jay.neer@molex.com

408-867-6630
endlcom@acm.org

EXPRESSION OF SUPPORT BY MANUFACTURERS

The following member companies of the SFF Committee voted in favor of this industry specification.

Amphenol
Dell Computer
EMC
Foxconn
Hewlett Packard
HGST
IBM
LSI
MGE
Molex
NetApp
Sandisk
Seagate
TE Connectivity
Volex
Western Digital

The following member companies of the SFF Committee voted to abstain on this industry specification.

Avago
FCI
Finisar
Luxshare-ICT
Oclaro
Panduit
Pioneer
Sumitomo
Toshiba
Xyratex

The user's attention is called to the possibility that implementation to this Specification may require use of an invention covered by patent rights. By distribution of this specification, no position is taken with respect to the validity of a claim or claims or of any patent rights in connection therewith. Members of the SFF Committee which advise that a patent exists are required to provide a statement of willingness to grant a license under these rights on reasonable and non-discriminatory terms and conditions to applicants desiring to obtain such a license.

Change History

Revision 2.0

- The speed characteristics and electrical considerations were removed from SFF-8680 in order to create SFF-8678.

Revision 2.1

- The SFF-8680 mechanicals replaced the content of SFF-8482. The speed characteristics and electrical considerations were restored from SFF-8678.

Foreword

The development work on this specification was done by the SFF Committee, an industry group. The membership of the committee since its formation in August 1990 has included a mix of companies which are leaders across the industry.

When 2 1/2" diameter disk drives were introduced, there was no commonality on external dimensions e.g. physical size, mounting locations, connector type, and connector location, between vendors.

The first use of these disk drives was in specific applications such as laptop portable computers and system integrators worked individually with vendors to develop the packaging. The result was wide diversity, and incompatibility.

The problems faced by integrators, device suppliers, and component suppliers led to the formation of the SFF Committee as an industry ad hoc group to address the marketing and engineering considerations of the emerging new technology.

During the development of the form factor definitions, other activities were suggested because participants in the SFF Committee faced more problems than the physical form factors of disk drives. In November 1992, the charter was expanded to address any issues of general interest and concern to the storage industry. The SFF Committee became a forum for resolving industry issues that are either not addressed by the standards process or need an immediate solution.

Those companies which have agreed to support a specification are identified in the first pages of each SFF Specification. Industry consensus is not an essential requirement to publish an SFF Specification because it is recognized that in an emerging product area, there is room for more than one approach. By making the documentation on competing proposals available, an integrator can examine the alternatives available and select the product that is felt to be most suitable.

SFF Committee meetings are held during T10 weeks (see www.t10.org), and Specific Subject Working Groups are held at the convenience of the participants. Material presented at SFF Committee meetings becomes public domain, and there are no restrictions on the open mailing of material presented at committee meetings.

Most of the specifications developed by the SFF Committee have either been incorporated into standards or adopted as standards by EIA (Electronic Industries Association), ANSI (American National Standards Institute) and IEC (International Electrotechnical Commission).

If you are interested in participating or wish to follow the activities of the SFF Committee, the signup for membership and/or documentation can be found at:
www.sffcommittee.com/ie/join.html

The complete list of SFF Specifications which have been completed or are currently being worked on by the SFF Committee can be found at:
<ftp://ftp.seagate.com/sff/SFF-8000.TXT>

If you wish to know more about the SFF Committee, the principles which guide the activities can be found at:
<ftp://ftp.seagate.com/sff/SFF-8032.TXT>

Suggestions for improvement of this specification will be welcome. They should be sent to the SFF Committee, 14426 Black Walnut Ct, Saratoga, CA 95070.

TABLE OF CONTENTS

1. Scope	5
1.1 Application Specific Criteria	5
2. References	5
2.1 Industry Documents	5
2.2 SFF Specifications	5
2.3 Sources	5
2.4 Conventions	5
3. General Description	6
4. Overview of Referenced Specifications	6
4.1 Application Requirements	6
4.2 SFF-8482	6

FIGURES

Figure 3-1 Documentation to Implement a 12 Gb/s Connector	6
Figure 4-1 General Views	7

SFF Committee --

Serial Attachment 2X 12 Gb/s Unshielded Connector

1. Scope

This specification defines the mechanical and connector contact performance requirements for a composite connector system. This composite system is designed to support high speed serial signals and power on different contacts within the same housing.

1.1 Application Specific Criteria

Intended applications for this connector system include Serial Attached SCSI (SAS) as specified by the T10 standards and for other applications requiring such a connector system.

This connector shall meet the electrical performance requirements defined by SAS and is capable of intermating with previous generations of lower speed SAS.

2. References

2.1 Industry Documents

The following interface standards are relevant to this SFF Specification.

- INCITS 417 Serial Attached SCSI 1.1 (SAS-1.1)
- INCITS 457 Serial Attached SCSI 2 (SAS-2)
- INCITS 478 Serial Attached SCSI 2.1 (SAS-2.1)
- INCITS 519 Serial Attached SCSI - 3 (SAS-3)
- SFF-8223 2.5 inch Form Factor Drive w/Serial Attached Connector (EIA-720)
- SFF-8323 3.5 inch Form Factor Drive w/Serial Attached Connector (EIA-740)
- SFF-8482 Serial Attachment 2X Unshielded Connector (EIA-966)
- SFF-8678 Serial Attachment 2X 6 Gb/s Unshielded Connector

2.2 SFF Specifications

There are several projects active within the SFF Committee. The complete list of specifications which have been completed or are still being worked on are listed in the specification at <ftp://ftp.seagate.com/sff/SFF-8000.TXT>

2.3 Sources

Those who join the SFF Committee as an Observer or Member receive electronic copies of the minutes and SFF specifications (<http://www.sffcommittee.com/ie/join.html>).

Copies of ANSI standards may be purchased from the InterNational Committee for Information Technology Standards (<http://www.techstreet.com/incitsgate.tmp1>).

2.4 Conventions

The ISO convention of numbering is used i.e., the thousands and higher multiples are separated by a space and a period is used as the decimal point. This is equivalent to the English/American convention of a comma and a period.

American	French	ISO
0.6	0,6	0.6
1,000	1 000	1 000
1,323,462.9	1 323 462,9	1 323 462.9

3. General Description

This specification identifies the documentation required to implement a two lane 12 Gb/s unshielded connector suitable to the using applications, as illustrated in the following pictorial representation.

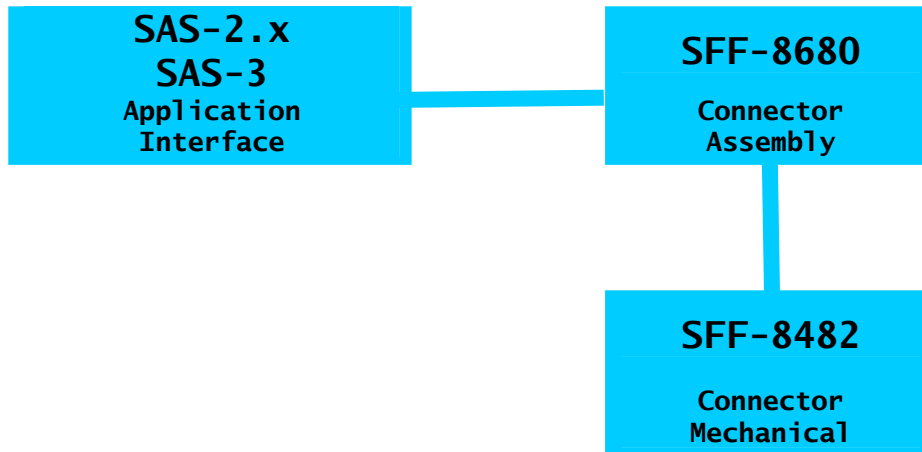


FIGURE 3-1 DOCUMENTATION TO IMPLEMENT A 12 GB/S CONNECTOR

4. Overview of Referenced Specifications

4.1 Application Requirements

The electrical and EMI considerations for the use of this connector are specified by the using standards listed in Section 1.1


4.2 SFF-8482

This connector system is designed to allow devices to connect to cable assemblies or to PCB's with the same device connector interface.

The device free (plug) interface incorporates three different contact sets (CS). Two of these sets (CS1 and CS2) contain 7 contacts each and typically are used for high speed serial signals. The high speed signals are grouped into differential pairs flanked with Grounds (G-S-S-G-S-S-G). The third set (CS3) contains 15 contacts and typically would be used for low frequency purposes such as power and control.

The backplane fixed (receptacle) interface supports device free (plug) interfaces which have CS1 and CS3 only or has all CS1, CS2 and CS3 contacts. Blind mating is supported by the guides built into the mating interface and a provision for hot plugging is supported by the contact sequencing that is possible by using the offset contact positions.

There is no provision for positive mating interface retention latching in the backplane fixed version.

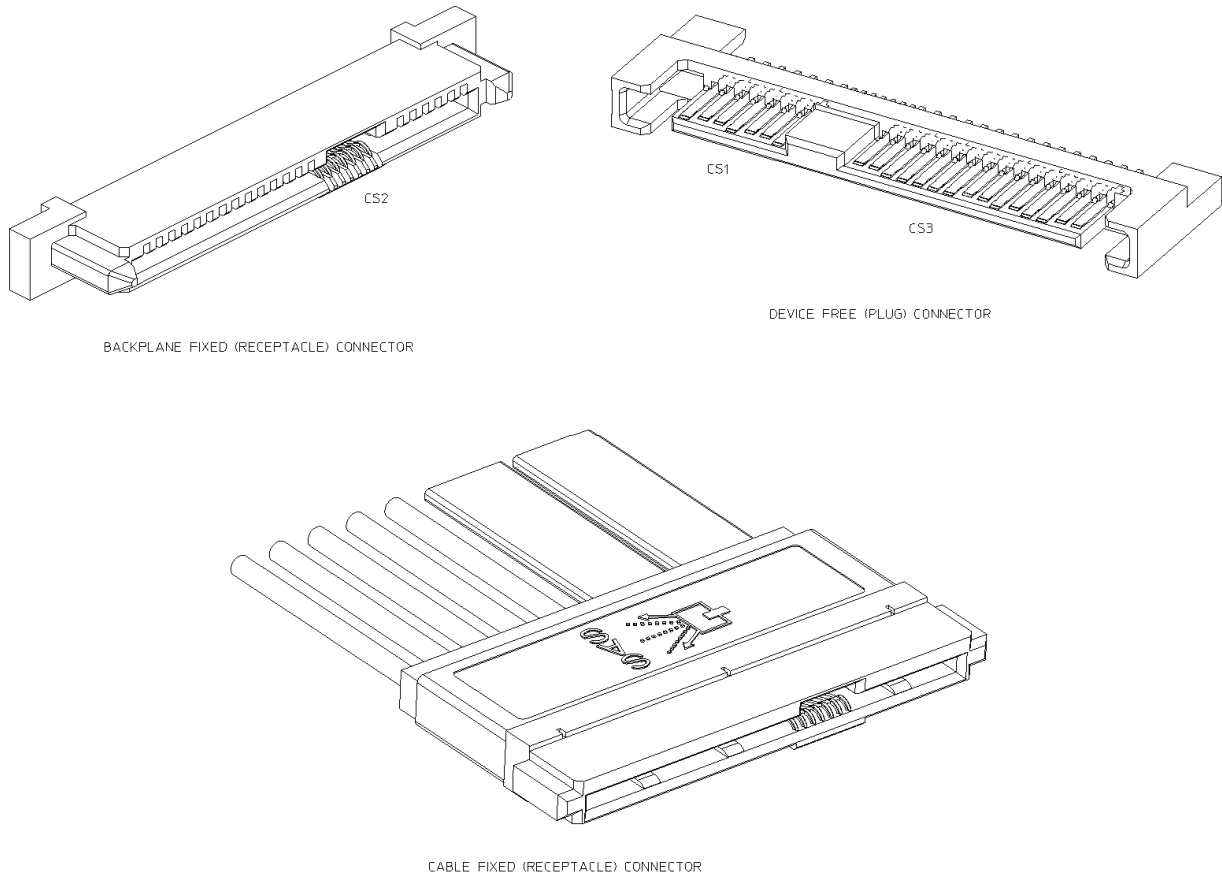**FIGURE 4-1 GENERAL VIEWS**

The cable fixed (receptacle) supports device free (plug) interfaces which have CS1 and CS3 only or has all CS1, CS2 and CS3 contacts. The cable fixed (receptacle) interface incorporates a passive latching retention system to prevent accidental disconnection of the interface.

For cabled backplane implementation, the cable connector shall provide all feature requirements of the backplane fixed (receptacle) in addition to the passive cable retention defined.