

**REF-TA-1011**

Reference Guide for

Cross Reference to Select SFF Connectors and Modules

Rev 1.1

October 1, 2019

SECRETARIAT: SFF TA TWG

This reference guide is made available for public review at <http://www.snia.org/sff/specifications>. Comments may be submitted at <http://www.snia.org/feedback>. Comments received will be considered for inclusion in future revisions of this document.

The descriptions of any of the connectors in this reference guide do not assure that any specific component is available from one or more connector suppliers. If such a connector is supplied, it must comply with its respective specifications referenced in this guide to achieve interoperability between suppliers.

ABSTRACT: This reference guide defines the naming conventions for the various configurations of pluggable I/O solutions.

POINTS OF CONTACT:

Alex Haser
Molex LLC.
2222 Wellington Ct.
Lisle, IL 60532
630-718-5418
alex.haser@molex.com

Chairman SFF TA TWG
Email: SFF-Chair@snia.org

Intellectual Property

The user's attention is called to the possibility that implementation of this specification may require the use of an invention covered by patent rights. By distribution of this specification, no position is taken with respect to the validity of a claim or claims or of any patent rights in connection therewith.

This specification is considered SNIA Architecture and is covered by the SNIA IP Policy and as a result goes through a request for disclosure when it is published. Additional information can be found at the following locations:

- Results of IP Disclosures: <http://www.snia.org/sffdisclosures>
- SNIA IP Policy: <http://www.snia.org/ippolicy>

Copyright

The SNIA hereby grants permission for individuals to use this document for personal use only, and for corporations and other business entities to use this document for internal use only (including internal copying, distribution, and display) provided that:

1. Any text, diagram, chart, table or definition reproduced shall be reproduced in its entirety with no alteration, and,
2. Any document, printed or electronic, in which material from this document (or any portion hereof) is reproduced shall acknowledge the SNIA copyright on that material, and shall credit the SNIA for granting permission for its reuse.

Other than as explicitly provided above, there may be no commercial use of this document, or sale of any part, or this entire document, or distribution of this document to third parties. All rights not explicitly granted are expressly reserved to SNIA.

Permission to use this document for purposes other than those enumerated (Exception) above may be requested by e-mailing copyright_request@snia.org. Please include the identity of the requesting individual and/or company and a brief description of the purpose, nature, and scope of the requested use. Permission for the Exception shall not be unreasonably withheld. It can be assumed permission is granted if the Exception request is not acknowledged within ten (10) business days of SNIA's receipt. Any denial of permission for the Exception shall include an explanation of such refusal.

Disclaimer

The information contained in this publication is subject to change without notice. The SNIA makes no warranty of any kind with regard to this specification, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The SNIA shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this specification.

Suggestions for revisions should be directed to <http://www.snia.org/feedback/>.

Foreword

The development work on this document was done by the SNIA SFF TA TWG, an industry group. Since its formation as the SFF Committee in August 1990, the membership has included a mix of companies which are leaders across the industry.

For those who wish to participate in the activities of the SFF TA TWG, the signup for membership can be found at:

<http://www.snia.org/sff/join>

Change History**Rev 1.0** *September 12, 2018*

- Original content was taken from Section 3 of SFF-8024
- Table content updated to reflect current document status per July 2018

Rev 1.1 *October 1, 2019*

- Added SAS-4.1 references where applicable
- Add references for SFF-8431 and SFF-8639
- Table 4-1 entry for SFP changed to include "Superseded by SFP+ (see below)"
- Table 4-1 entry for SFP+ changed to "SFF-8431 (Archived) → Superseded by SFP10" Added SFP56 and QSFP56 (Styles A & B) to Table 4-1 and added a note
- Added SFF-8639 to Table 4-3
- Minor formatting and editorial changes

CONTENTS

1. Scope	5
2. References and Conventions	5
2.1 Industry Documents	5
2.2 Sources	5
2.3 Conventions	6
3. Definitions	6
4. Specifications Related to Select Form Factors	7

FIGURES

Figure 3-1 Dual Card Connector	6
Figure 3-2 Single Card Connector	6

TABLES

Table 4-1 Single-Card Pluggable Modules and I/O Connectors	7
Table 4-2 Dual-Card Pluggable modules and I/O Connectors	7
Table 4-3 Device Connectors	7

1. Scope

This document provides a cross reference between the names of connectors and pluggable modules and the SFF specifications which define them.

2. References and Conventions

2.1 Industry Documents

- INCITS 417 SAS-1.1 (Serial Attached SCSI – 1.1)
- INCITS 478 SAS-2.1 (Serial Attached SCSI – 2.1)
- INCITS 519 SAS-3 (Serial Attached SCSI - 3)
- INCITS 534 SAS-4 (Serial Attached SCSI - 4)
- INCITS 567 SAS-4.1 (Serial Attached SCSI – 4.1)
- InfiniBand Architecture Specification Volume 2
- SFF-8071 SFP+ 1X 0.8mm Card Edge Connector
- INF-8074 Small Formfactor Pluggable (SFP) Transceiver
- INF-8077 XFP 1X 10 Gb/s Pluggable Module
- SFF-8418 SFP+ 10 Gb/s Electrical Interface
- SFF-8419 SFP+ Power and Low Speed Interface
- SFF-8431 Enhanced Small Form Factor Pluggable Module SFP+
- SFF-8432 SFP+ Module and Cage
- SFF-8433 SFP+ Ganged Cage
- SFF-8436 QSFP+ 4X 10 Gb/s Pluggable Transceiver
- INF-8438 QSFP 4X 4 Gb/s Transceiver (Quad SFP)
- SFF-8449 Management Interface for SAS Shielded Cables
- SFF-8472 Management Interface for SFP+
- SFF-8482 Serial Attachment 2X Unshielded Connector
- SFF-8613 Mini Multilane 4/8X Unshielded Connector (HDun)
- SFF-8614 Mini Multilane 4/8X Shielded Cage/Connector (HDsh)
- SFF-8617 Mini Multilane 12X Shielded Cage/Connector (CXP)
- SFF-8630 Serial Attachment 4X Unshielded Connector
- SFF-8636 Management Interface for 4-lane Modules and Cables
- SFF-8639 Multifunction 6X Unshielded Connector
- SFF-8642 Mini Multilane 12X 10 Gb/s Shielded Connector (CXP10)
- SFF-8661 QSFP+ 4X Pluggable Module
- SFF-8662 QSFP+ 4X Connector (Style A)
- SFF-8663 QSFP+ Cage (Style A)
- SFF-8672 QSFP+ 4X Connector (Style B)
- SFF-8679 QSFP+ 4X Base Electrical Specification
- SFF-8680 Serial Attachment 2X 12 Gb/s Unshielded Connector
- SFF-8682 QSFP+ 4X Connector
- SFF-8683 QSFP+ Cage

2.2 Sources

The complete list of SFF documents which have been completed, are currently being worked on, or that have been expired by the SFF Committee can be found at <http://www.snia.org/sff/specifications>. Suggestions for improvement of this specification will be welcome, they should be submitted to <http://www.snia.org/feedback>.

Copies of SAS standards may be obtained from the International Committee for Information Technology Standards (INCITS) (<http://www.incits.org>).

Copies of InfiniBand standards may be obtained from the InfiniBand Trade Association (IBTA) (<http://www.infinibandta.org>).

2.3 Conventions

The following conventions are used throughout this document:

DEFINITIONS

Certain words and terms used in this standard have a specific meaning beyond the normal English meaning. These words and terms are defined either in the definitions or in the text where they first appear.

ORDER OF PRECEDENCE

If a conflict arises between text, tables, or figures, the order of precedence to resolve the conflicts is text; then tables; and finally figures. Not all tables or figures are fully described in the text. Tables show data format and values.

3. Definitions

For the purposes of this document, the following definitions apply:

Dual-Card Connector: Connectors in which all receptacle contacts mate to one of two PCBs per port on the module side of the interface.

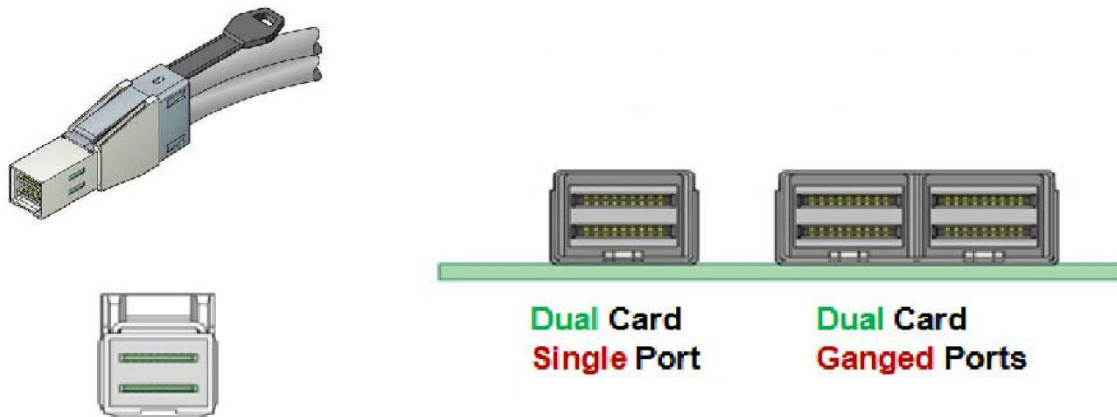


FIGURE 3-1 DUAL CARD CONNECTOR

Single-Card Connector: Connectors in which all receptacle contacts mate to a single PCB on the module side of the interface.

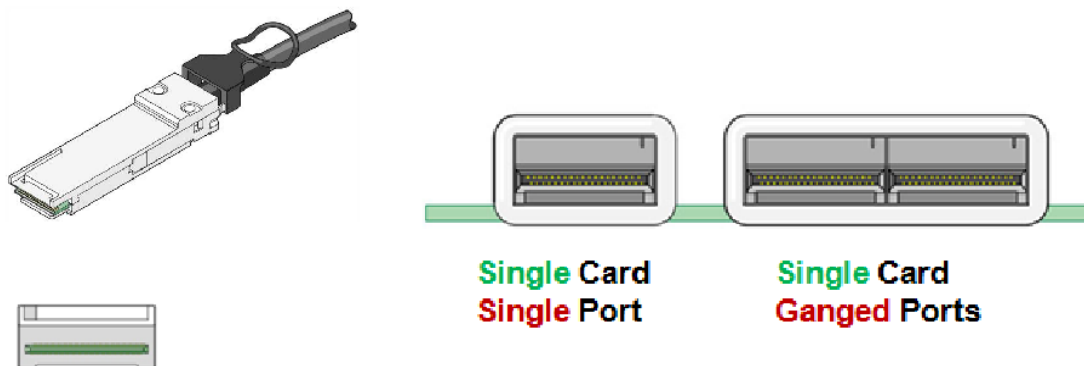


FIGURE 3-2 SINGLE CARD CONNECTOR

4. Specifications Related to Select Form Factors

Table 4-1 and Table 4-2 list the relevant SFF specifications for select form factors. Please note that in Table 4-1 and Table 4-2, the gray color denotes expired or superseded SFF documents.

TABLE 4-1 SINGLE-CARD PLUGGABLE MODULES AND I/O CONNECTORS

	Mechanical				Low Speed & General Electrical	Management Interface
	Module	Connector	Single Port Cage	Ganged Port Cage		
SFP	INF-8074 → Superseded by SFP+ (see below)					
SFP+	SFF-8431 (Archived) → Superseded by SFP10					
SFP10	SFF-8432	SFF-8071	SFF-8432	SFF-8433	SFF-8418 & SFF-8419	SFF-8472
SFP16, SFP28, & SFP56					SFF-8419	
XFP	INF-8077					
QSFP	INF-8438 → Superseded by QSFP+ (see below)					
QSFP+	SFF-8436 (Expired) → Superseded by QSFP10 (see below)					
QSFP10 & QSFP14	SFF-8661	SFF-8682	SFF-8683	NA	SFF-8679	SFF-8636
QSFP28 & QSFP56		SFF-8672 Style B*				
		SFF-8662 Style A*	SFF-8663 Style A*			

*Both Style 'A' and Style 'B' are suitable for 28 Gb/s (including PAM4 use, up to 56 Gbps on each lane) and may be suitable for 56 Gb/s (including PAM4 use, up to 112 Gbps on each lane) applications.

TABLE 4-2 DUAL-CARD PLUGGABLE MODULES AND I/O CONNECTORS

	Mechanical				Low Speed & General Electrical	Management Interface
	Module	Connector	Single Port Cage	Ganged Port Cage		
CXP10	SFF-8642 (Expired) → Superseded by CXP14 (see below)				IBTA QDR	NA
CXP14	SFF-8617				IBTA FDR	
CXP28					IBTA EDR	
HD12un	SFF-8613		NA	SAS-2.1/SAS-3	SFF-8636 & SFF-8449	
HD24un				SAS-4/SAS-4.1		
HD12sh	SFF-8614		NA	SAS-2.1/SAS-3	SFF-8636 & SFF-8449	
HD24sh				SAS-4/SAS-4.1		

TABLE 4-3 DEVICE CONNECTORS

Connector	Application	No. of ports
SFF-8482	SAS 1.1 SAS-2.1 SAS-4/SAS-4.1	2
SFF-8680	SAS-3	
SFF-8630	SAS-3 SAS-4/SAS-4.1	4
SFF-8639	8 GT/s PCIe 16 GT/s PCIe SAS-3 SAS-4/ SAS-4.1	