

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39



SFF-TA-1013

Specification for

Fabric Device Mechanical Specification

Rev 0.0.1 November 05, 2018

SECRETARIAT: SFF TA TWG

This specification is made available for public review at <http://www.snia.org/sff/specifications>. Comments may be submitted at <http://www.snia.org/feedback>. Comments received will be considered for inclusion in future revisions of this specification.

The description of the connector in this specification does not assure that the specific component is available from connector suppliers. If such a connector is supplied, it must comply with this specification to achieve interoperability between suppliers.

ABSTRACT: This document defines the Fabric Device Mechanical Specification

The Fabric Device is a high availability dual fabric attached subsystem and is agnostic to the fabric interface. The physical form factor will support direct fabric attached devices such as Flash, HDD, compute, GPU, FPGA, and memory. Fabric Devices will be designed to sufficiently enable vendor-unique enclosure designs to accommodate Fabric Devices; they are intended to be compatible with 19" and OCP racks.

POINTS OF CONTACT:

John P. Blythe, P.E.
Western Digital Corporation
9950 Federal Drive
Suite 100
Colorado Springs, CO 80921
Ph: 719-799-4657
Email: John.Blythe@wdc.com

Chairman SFF TA TWG
Email: SFF-Chair@snia.org

Intellectual Property

The user's attention is called to the possibility that implementation of this specification may require the use of an invention covered by patent rights. By distribution of this specification, no position is taken with respect to the validity of a claim or claims or of any patent rights in connection therewith.

This specification is considered SNIA Architecture and is covered by the SNIA IP Policy and as a result goes through a request for disclosure when it is published. Additional information can be found at the following locations:

- Results of IP Disclosures: <http://www.snia.org/sffdisclosures>
- SNIA IP Policy: <http://www.snia.org/ippolicy>

Copyright

The SNIA hereby grants permission for individuals to use this document for personal use only, and for corporations and other business entities to use this document for internal use only (including internal copying, distribution, and display) provided that:

1. Any text, diagram, chart, table or definition reproduced shall be reproduced in its entirety with no alteration, and,
2. Any document, printed or electronic, in which material from this document (or any portion hereof) is reproduced shall acknowledge the SNIA copyright on that material, and shall credit the SNIA for granting permission for its reuse.

Other than as explicitly provided above, there may be no commercial use of this document, or sale of any part, or this entire document, or distribution of this document to third parties. All rights not explicitly granted are expressly reserved to SNIA.

Permission to use this document for purposes other than those enumerated (Exception) above may be requested by e-mailing copyright_request@snia.org. Please include the identity of the requesting individual and/or company and a brief description of the purpose, nature, and scope of the requested use. Permission for the Exception shall not be unreasonably withheld. It can be assumed permission is granted if the Exception request is not acknowledged within ten (10) business days of SNIA's receipt. Any denial of permission for the Exception shall include an explanation of such refusal.

Disclaimer

The information contained in this publication is subject to change without notice. The SNIA makes no warranty of any kind with regard to this specification, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The SNIA shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this specification.

Suggestions for revisions should be directed to <http://www.snia.org/feedback/>.


1 **Foreword**

2 The development work on this specification was done by the SNIA SFF TWG, an industry group. Since its formation
3 as the SFF Committee in August 1990, the membership has included a mix of companies which are leaders across
4 the industry.


5
6 For those who wish to participate in the activities of the SFF TWG, the signup for membership can be found at
7 <http://www.snia.org/sff/join>.

8
9
10 **Revision History**

- 11
12 **Rev 0.0.1** November 05, 2018:
13 - Initial release of document
14 - Fabric Device Mechanical Specification
15
16

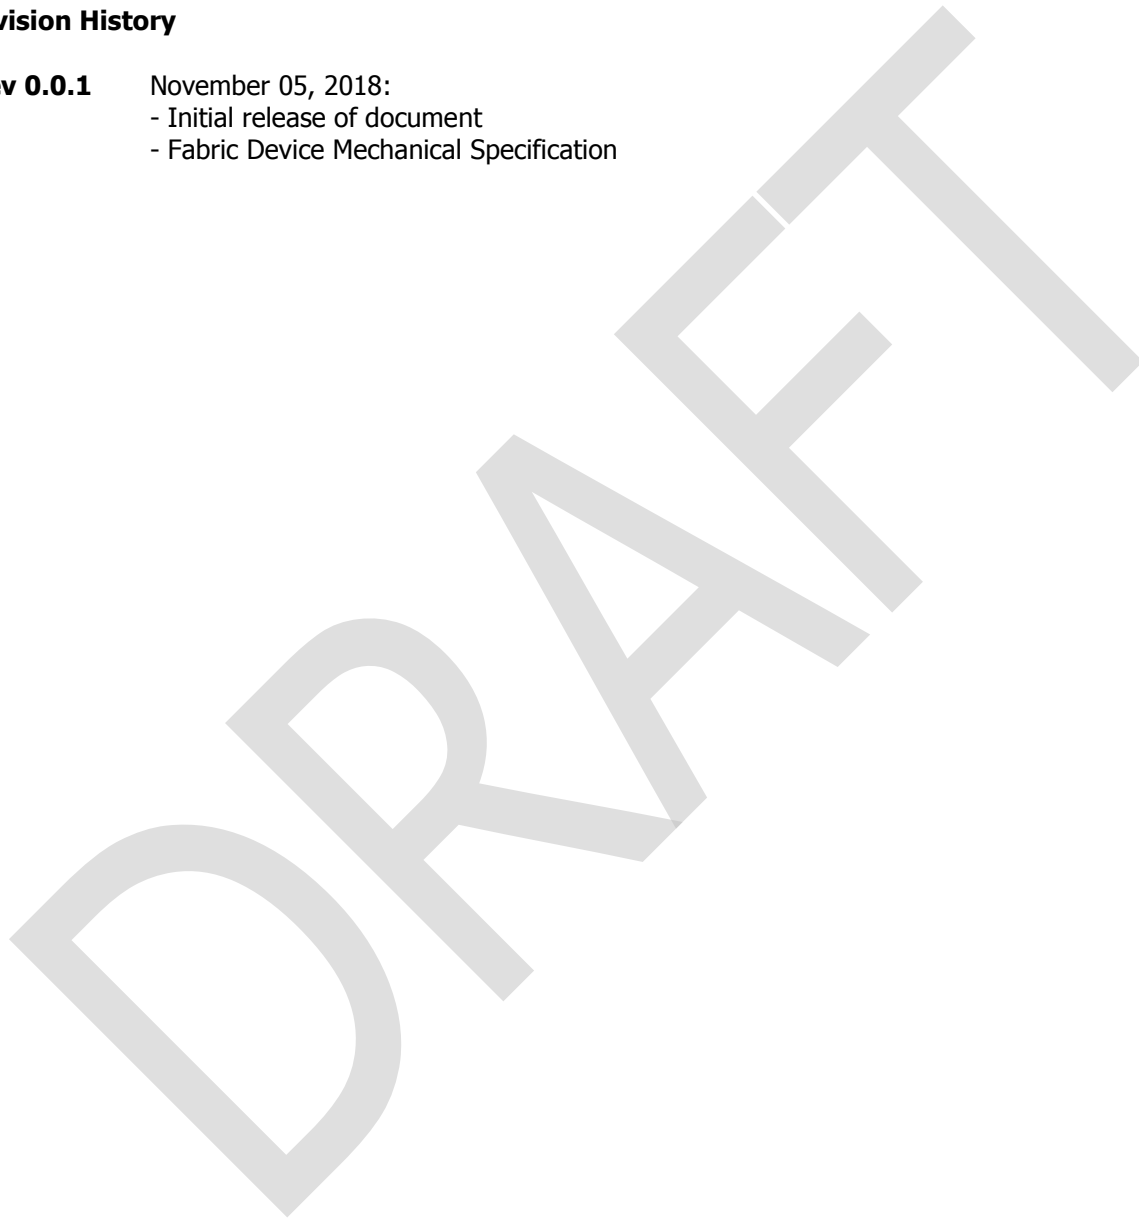

1	Table of Contents	
2	1. Scope	6
3	2. References and Conventions	6
4	2.1 Industry Documents	6
5	2.2 Sources	6
6	2.3 Conventions	7
7	3. Keywords, Acronyms, and Definitions	8
8	3.1 Keywords	8
9	3.2 Acronyms and Abbreviations	9
10	3.3 Definitions	10
11	4. General Description	12
12	4.1 Configuration Overview/Descriptions	12
13	4.1.1 Carrier Mounting Keyhole	16
14	5. Connector Mechanical Specification	17
15	5.1 Overview	17
16	5.1.1 Connector Detail	17
17	6. Thermal Design	19
18	6.1 Maximum External Temperatures	19
19	6.2 Airflow Impedance Matching	19
20	6.2.1 Pressure / Impedance Drop	19
21		
22		

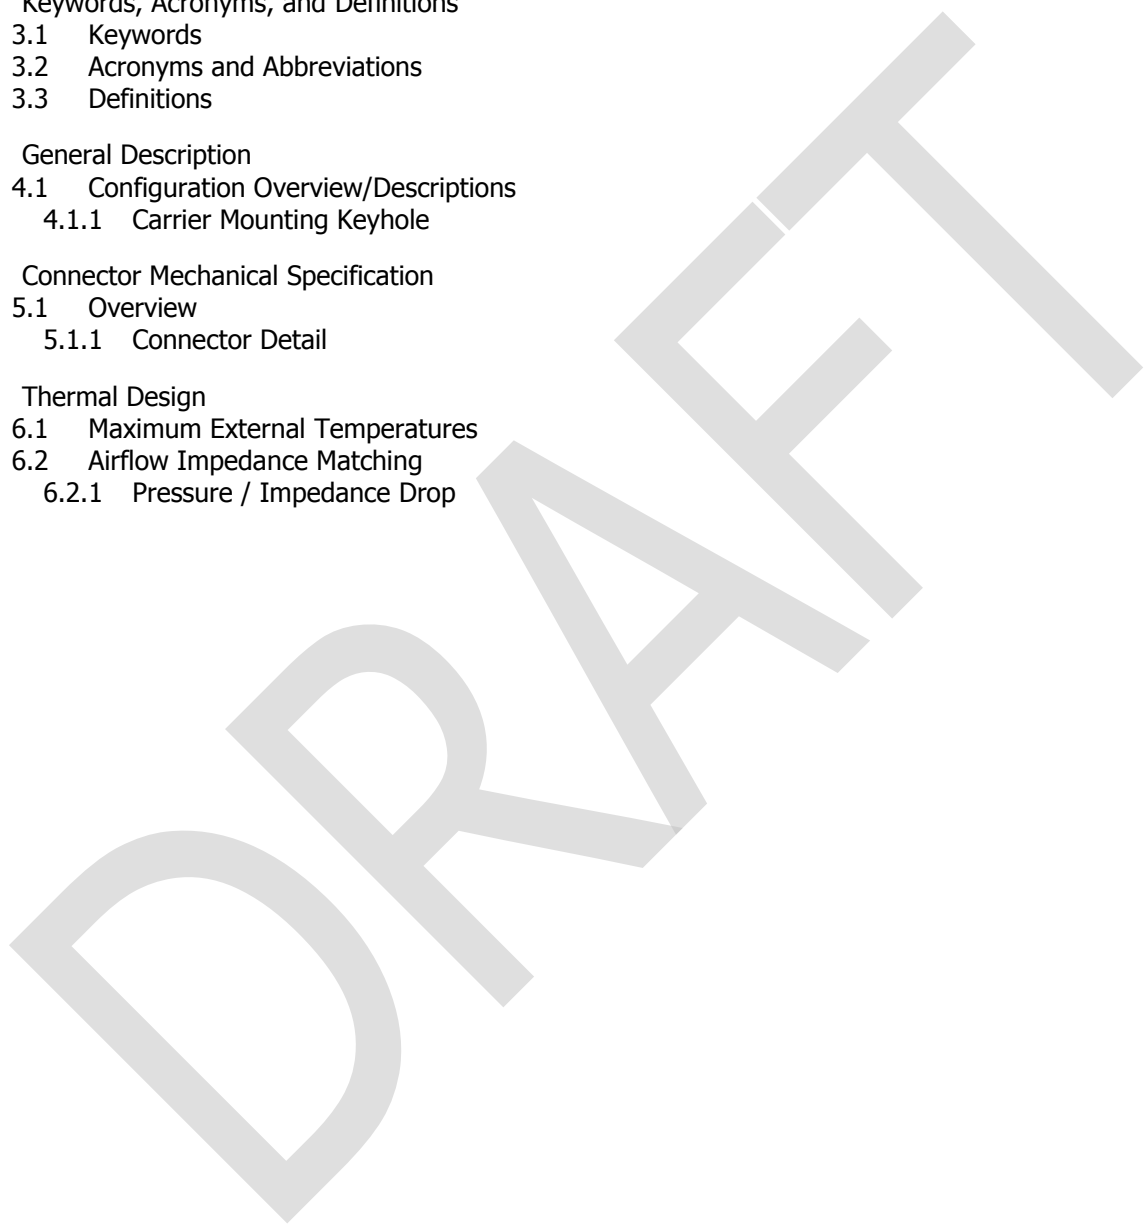

1 **Table of Figures**

2 Figure 3-1 Plug and Receptacle Definition 10

3 Figure 3-2 Wipe for a Continuous Contact 11

4 Figure 4-1 Fabric Device Front Isometric View 13

5 Figure 4-2 Fabric Device Rear Isometric 13

6 Figure 4-3 Fabric Device Dimensional Details 14

7 Figure 4-4 Carrier Mounting Keyhole Details (reference Figure 4-1) 15

8 Figure 5-1 Connector Detail "D" (reference Figure 4-3) 17

9 Figure 5-2 Initial Guide Pin Alignment 18

10 Figure 5-3 Initial Connector Guide Alignment 18

11 Figure 5-4 Initial Connector Contact (Start of Wipe) 18

12 Figure 6-1 - Fabric Device Impedance Curve 19

13

14

15 **Table of Tables**

16 Table 1 – Fabric Device Dimensions 12

17

18



1. Scope

This specification defines the Mechanical Specification for the Fabric Device. The intended environment for the Fabric Device is any cabinet, rack, enclosure or similar enclosure residing in an office or data center environment or similar. This specification will provide information that will assist vendors to design products that can fit in the same packaging envelope.

2. References and Conventions

2.1 Industry Documents

- SFF-TA-1014 Connector
- ASME Y14.5M Dimensioning and Tolerancing
- SFF-TA-1015 Pinout
- UL 60950-1 UL Information Technology Equipment - Safety

2.2 Sources

The complete list of SFF documents which have been completed, are currently being worked on, or that have been expired by the SFF Committee can be found at <http://www.snia.org/sff/specifications>. Suggestions for improvement of this specification will be welcome, they should be submitted to <http://www.snia.org/feedback>.

Copies of ANSI standards may be obtained from the InterNational Committee for Information Technology Standards (<http://www.techstreet.com/incitsgate.tmpl>).

Copies of PCIe standards may be obtained from PCI-SIG (<http://pcisig.com>).

Copies of InfiniBand standards may be obtained from the InfiniBand Trade Association (IBTA) (<http://www.infinibandta.org>).

Copies of IEEE standards may be obtained from the Institute of Electrical and Electronics Engineers (IEEE) (<https://www.ieee.org>).

Copies of SAS standards may be obtained from the International Committee for Information Technology Standards (INCITS) (<http://www.incits.org>).

Copies of JEDEC standards may be obtained from the Joint Electron Device Engineering Council (<https://www.jedec.org>).

Copies of OIF Implementation Agreements may be obtained from the Optical Internetworking Forum (<http://www.oiforum.com>).

Copies of ASME standards may be obtained from the American Society of Mechanical Engineers (<https://www.asme.org>).

Copies of Electronic Industries Alliance (EIA) standards may be obtained from the Electronic Components Industry Association (ECIA) (<https://www.ecianow.org>).

2.3 Conventions

The following conventions are used throughout this document:

DEFINITIONS

Certain words and terms used in this standard have a specific meaning beyond the normal English meaning. These words and terms are defined either in the definitions or in the text where they first appear.

ORDER OF PRECEDENCE

If a conflict arises between text, tables, or figures, the order of precedence to resolve the conflicts is text; then tables; and finally figures. Not all tables or figures are fully described in the text. Tables show data format and values.

LISTS

Lists sequenced by lowercase or uppercase letters show no ordering relationship between the listed items.

EXAMPLE 1 - The following list shows no relationship between the named items:

- a. red (i.e., one of the following colors):
 - A. crimson; or
 - B. pink;
- b. blue; or
- c. green.

Lists sequenced by numbers show an ordering relationship between the listed items.

EXAMPLE 2 -The following list shows an ordered relationship between the named items:

- 1. top;
- 2. middle; and
- 3. bottom.

Lists are associated with an introductory paragraph or phrase, and are numbered relative to that paragraph or phrase (i.e., all lists begin with an a. or 1. entry).

DIMENSIONING CONVENTIONS

The dimensioning conventions are described in ASME-Y14.5, Geometric Dimensioning and Tolerancing. All dimensions are in millimeters, which are the controlling dimensional units (if inches are supplied, they are for guidance only).

NUMBERING CONVENTIONS

The ISO convention of numbering is used i.e., the thousands and higher multiples are separated by a space and a period is used as the decimal point. This is equivalent to the English/American convention of a comma and a period.

American	French	ISO
0.6	0,6	0.6
1,000	1 000	1 000
1,323,462.9	1 323 462,9	1 323 462.9

3. Keywords, Acronyms, and Definitions

For the purposes of this document, the following keywords, acronyms, and definitions apply.

3.1 Keywords

May/ may not: A keyword that indicates flexibility of choice with no implied preference.

Obsolete: A keyword indicating that an item was defined in prior specifications but has been removed from this specification.

Optional: A keyword that describes features which are not required by the SFF specification. However, if any feature defined by the SFF specification is implemented, it shall be done in the same way as defined by the specification. Describing a feature as optional in the text is done to assist the reader.

Prohibited: A keyword used to describe a feature, function, or coded value that is defined in a referenced specification to which this SFF specification makes a reference, where the use of said feature, function, or coded value is not allowed for implementations of this specification.

Reserved: A keyword used for defining the signal on a connector contact [when] its actual function is set aside for future standardization. It is not available for vendor specific use. Where this term is used for bits, bytes, fields, and code values; the bits, bytes, fields, and code values are set aside for future standardization. The default value shall be zero. The originator is required to define a Reserved field or bit as zero, but the receiver should not check Reserved fields or bits for zero.

Restricted: A keyword referring to features, bits, bytes, words, and fields that are set aside for other identified standardization purposes. A restricted bit, byte, word, or field shall be treated as a reserved bit, byte, word or field in the context where the restricted designation appears.

Shall: A keyword indicating a mandatory requirement. Designers are required to implement all such mandatory requirements to ensure interoperability with other products that conform to this specification.

Should: A keyword indicating flexibility of choice with a strongly preferred alternative.

Vendor specific: A keyword indicating something (e.g., a bit, field, code value) that is not defined by this specification. Specification of the referenced item is determined by the manufacturer and may be used differently in various implementations.

1 **3.2 Acronyms and Abbreviations**

- 2 **AOC:** Active Optical Cable
- 3 **DAC:** Direct Attach Copper (passive or active)
- 4 **EMLB:** Early Mate Late Break
- 5 **IDC:** Insulation Displacement Contact
- 6 **IDT:** Insulation Displacement Termination
- 7 **PCB:** Printed Circuit Board
- 8 **PF:** Press Fit
- 9 **PTH:** Plated Through Hole
- 10 **RA:** Right Angle
- 11 **SMT:** Surface Mount Technology
- 12 **HDD:** Hard Disk Drive
- 13 **Flash:** Flash Memory
- 14 **GPU:** Graphics Processing Unit
- 15 **FPGA:** Field Programmable Gate Array
- 16 **SSD:** Solid State Device or Solid State Drive
- 17



3.3 Definitions

Alignment guides: A term used to describe features that pre-align the two halves of a connector interface before electrical contact is established. Other common terms include: guide pins, guide posts, blind mating features, mating features, alignment features, and mating guides.

Canister: A generic term used to define the structure that contains the Fabric Device components.

Carrier: A generic term for physical part(s) added to a device to aid in removal, insertion, guidance, cosmetics, and indication.

Connector: Each half of an interface that, when joined together, establish electrical contact and mechanical retention between two components. In this specification, the term connector does not apply to any specific gender; it is used to describe the receptacle, the plug or the card edge, or the union of receptacle to plug or card edge. Other common terms include: connector interface, mating interface, and separable interface.

Contact mating sequence: A term used to describe the order of electrical contact established/ terminated during mating/un-mating. Other terms include: contact sequencing, contact positioning, mate first/break last, EMLB (early mate late break) staggered contacts, and long pin/short pin.

Contacts: A term used to describe connector terminals that make electrical connections across a separable interface.

Frontshell / Backshell: A term used to describe the metallic part of a module that provides mechanical and shielding continuity between the plug and receptacle. Other terms commonly used are: housing, snout, and metal shroud.

Module: In this specification, module refers to an assembly that is terminated at the end of a direct attach copper (DAC) or an active optical cable (AOC), intended to mate to a device.

Plug: A term used to describe the connector that contains the penetrating contacts of the connector interface as shown in Figure 3-1. Plugs typically contain stationary contacts. Other common terms include male, pin connector, and card edge.

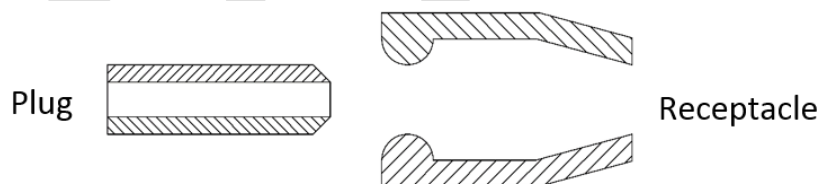


Figure 3-1 Plug and Receptacle Definition

Plated through hole termination: A term used to describe a termination style in which rigid pins extend into or through the PCB. Pins are soldered to keep the connector or cage in place. Other common terms are through hole or PTH.

Press fit: A term used to describe a termination style in which collapsible pins penetrate the surface of a PCB. Upon insertion, the pins collapse to fit inside the PCB's plated through holes. The connector or cage is held in place by the interference fit between the collapsed pins and the PCB.

Receptacle: A term used to describe the connector that contains the contacts that accept the plug contacts as shown in Figure 3-1. Receptacles typically contain spring contacts. Other common terms include female and socket connector.

Right Angle: A term used to describe either a connector design where the mating direction is parallel to the plane of the printed circuit board upon which the connector is mounted or a cable assembly design where the mating

1 direction is perpendicular to the bulk cable.
2

3 **Straddle mount:** A term used to describe a termination style that uses surface mount termination points on both
4 sides of a PCB.


5 **Straight:** A term used to describe a connector design where the mating direction is parallel to the bulk cable.
6

7 **Surface mount:** A term used to describe a termination style in which pins sit on pads on the surface of a PCB and
8 are then soldered to keep the connector or cage in place. Other common terms are surface mount technology or
9 SMT.

10
11 **Termination:** A term used to describe a connector's non-separable attachment point such as [a connector contact
12 to a bulk cable/ a cage to a PCB or flex circuit/ bulk cable to a PCB or flex circuit/ solder tail to PCB]. Common PCB
13 terminations include: surface mount (SMT), plated through hole termination (PTH), and press fit (PF). Common
14 cable terminations include insulation displacement contact (IDC), insulation displacement termination (IDT), wire
15 slots, solder, welds, crimps, and brazes.

16
17 **Vertical:** A term used to describe a connector design where the mating direction is perpendicular to the printed
18 circuit board upon which the connector is mounted.

19
20 **Wipe:** The distance a contact travels on the surface of its mating contact during the mating cycle as shown in
21 Figure 3-2.

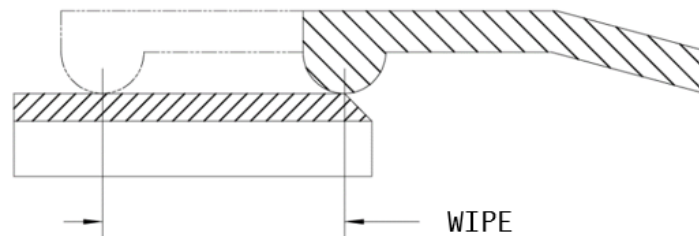

22
23 **Figure 3-2 Wipe for a Continuous Contact**
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47

4. General Description

4.1 Configuration Overview/Descriptions

Table 1 (Fabric Device Dimensions) specifies the dimensions for the Fabric Device and correlates them to the figures. Dimensions identified as obsolete are for reference and may apply to existing Fabric Device features. New Fabric Devices are to be designed to dimensions that are not identified as obsolete.

The specification allows only one location for the interface connector (SFF-TA-1015) on the Fabric Device.

Dim	Description	Value (mm)	Tolerance (mm)
A	Canister Width	37.10	TBD
B	Canister Height	121.5	TBD
C	Canister Depth	660.00	TBD
D	Keyhole Vertical Spacing	88.00	TBD
E	Keyhole Width Spacing	26.00	TBD
F	Carrier Pin Hole to Lower Keyhole Vertical	100.50	TBD
G	Lower Keyhole to Canister Base	15.00	TBD
H	Datum A to Canister Centerline	4.55	TBD
I	Datum B to Canister Base	16.61	TBD
J	Datum B to Lower Keyhole Vertical	1.61	TBD
K	Datum B to Upper Keyhole Vertical	86.39	TBD
L	Datum B to Carrier Pin Hole Vertical	98.89	TBD
M	Datum B to Canister Top	104.89	TBD
N	Carrier Pin Hole Diameter	3.25	TBD
O	REF K: Datum B to Upper Keyhole Vertical	<i>(86.39)</i>	TBD
P	Upper Canister Guide Notch Vertical	11.00	TBD
Q	Upper Canister Guide Notch Horizontal	1.25	TBD
R	Lower Left Canister Guide Notch Vertical	4.70	TBD
S	Datum A to Left Canister Side	14.00	TBD
T	Datum A to Lower Left Guide Notch	12.15	TBD
U	Datum A to Right Canister Side	23.10	TBD

Table 1 – Fabric Device Dimensions

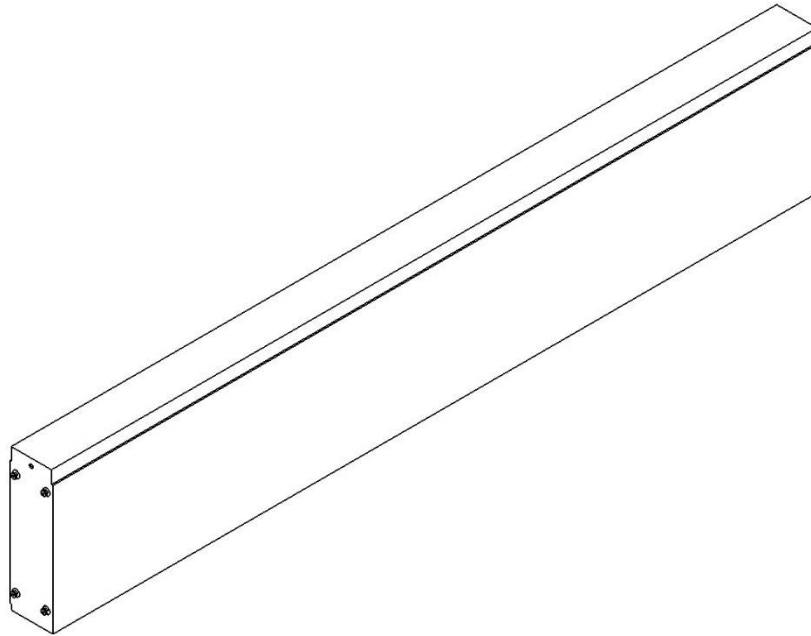


Figure 4-1 Fabric Device Front Isometric View


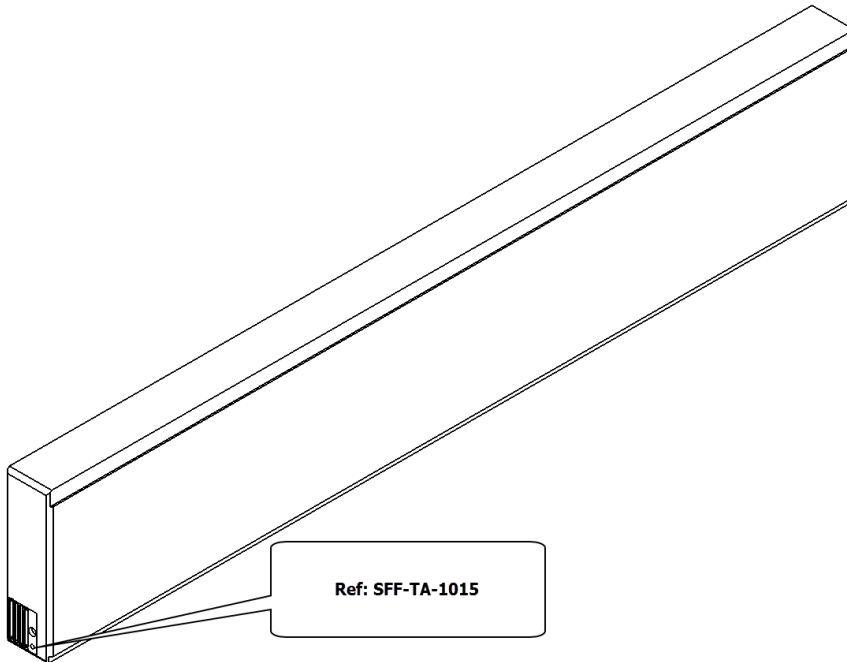


Figure 4-2 Fabric Device Rear Isometric

1
2

3
4
5
6
7
8
9

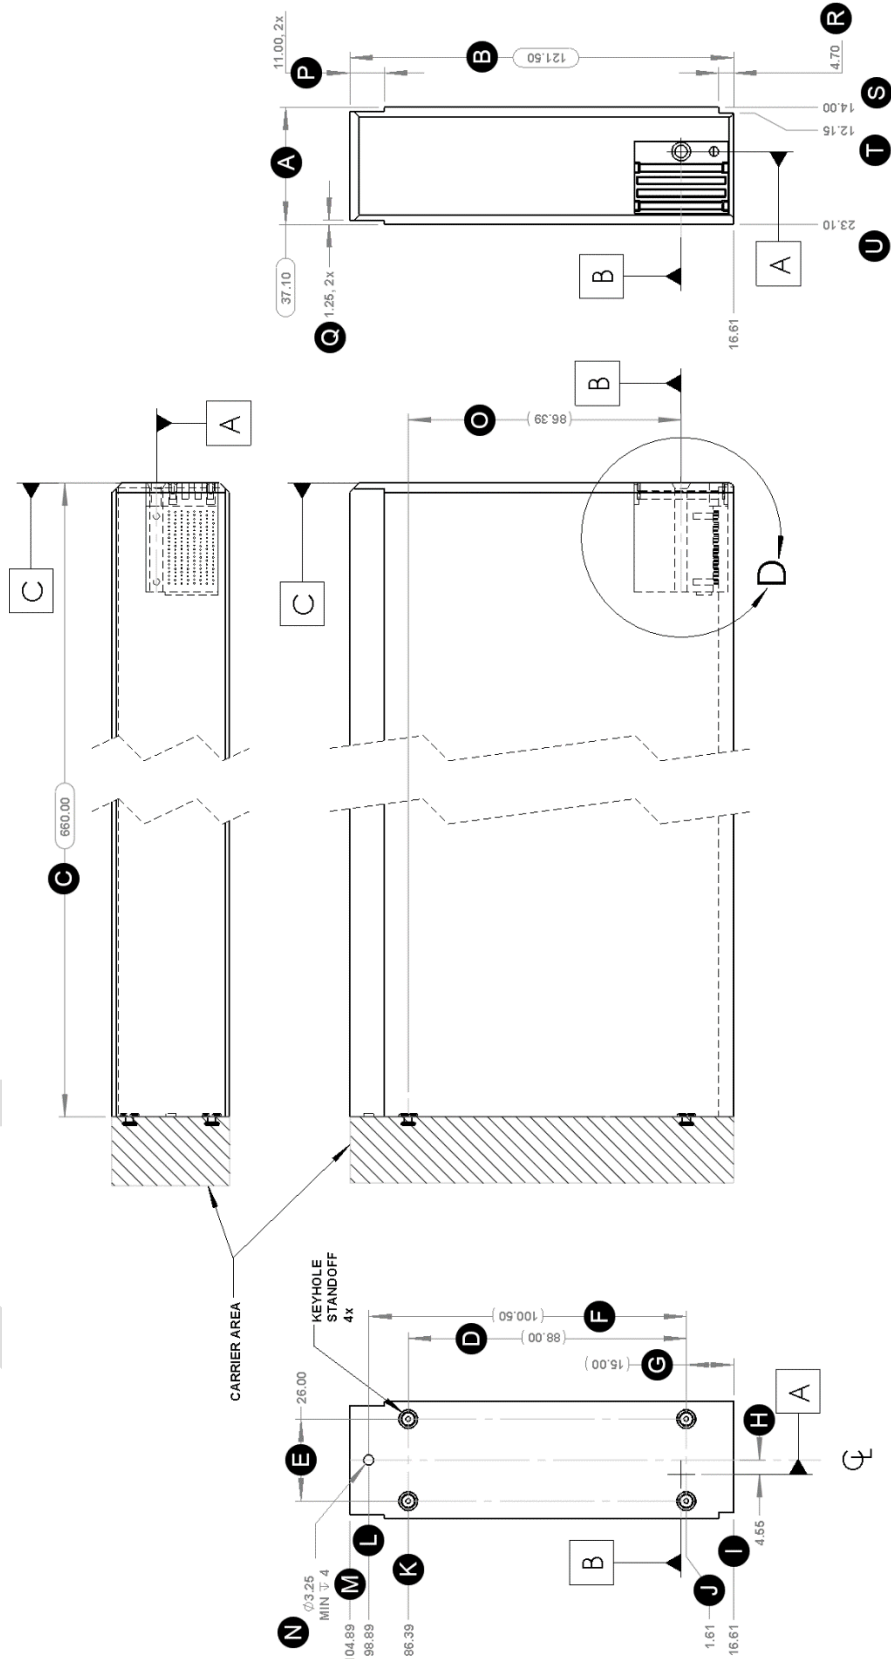

1
2
3

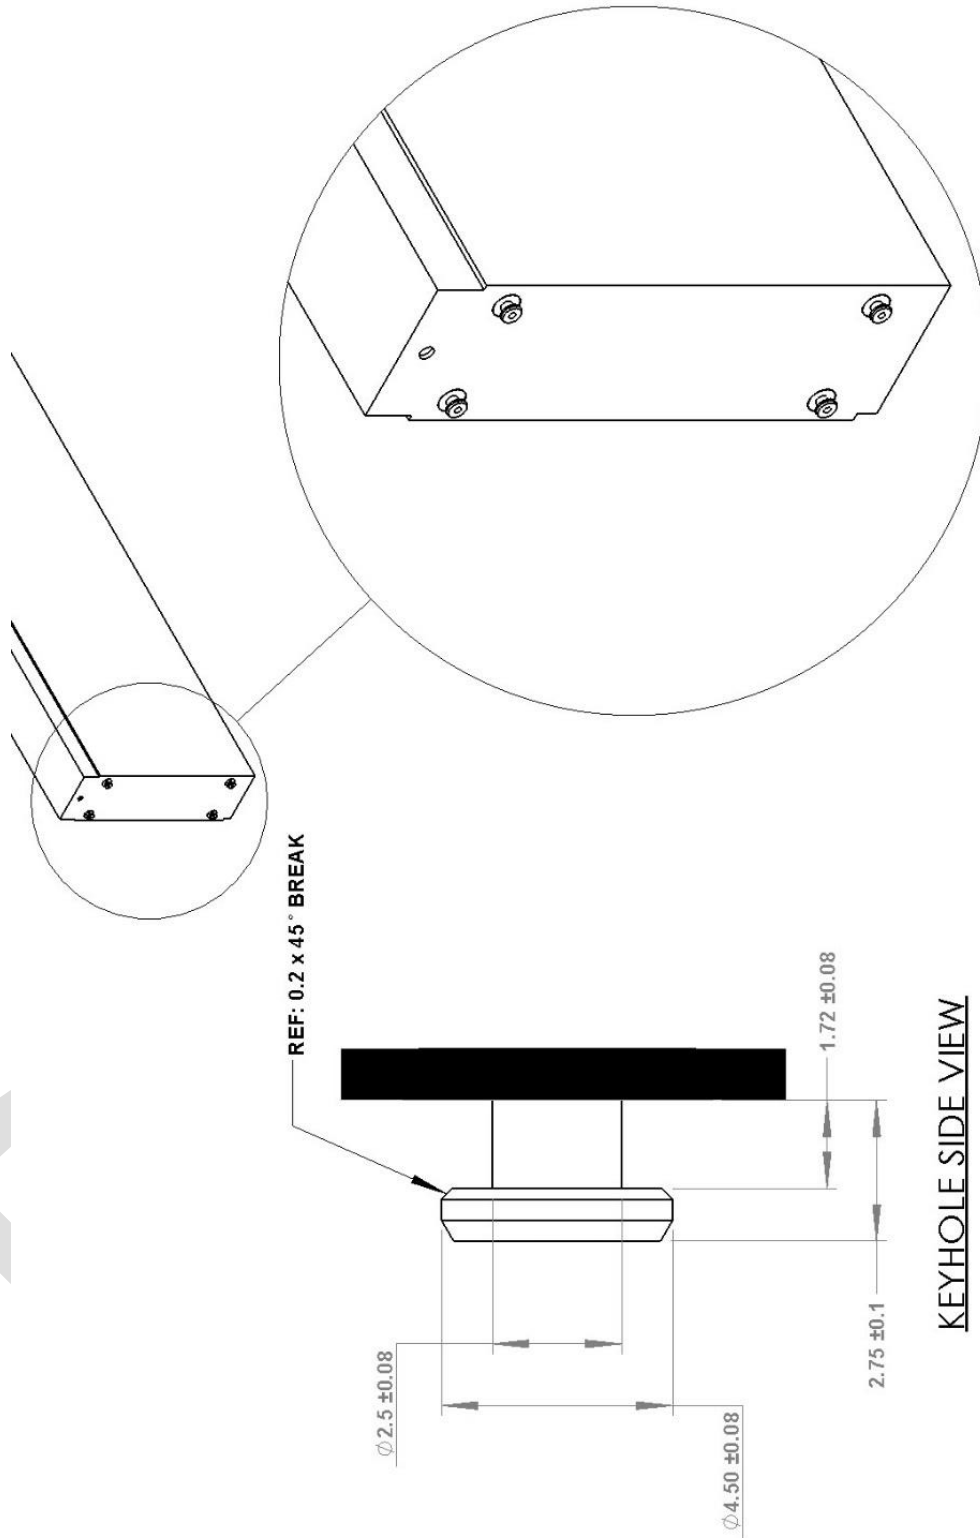


Figure 4-4 Carrier Mounting Keyhole Details (reference Figure 4-1)

1
2
3
4

1
2
3
4
5
6
7

4.1.1 Carrier Mounting Keyhole

The carrier mounting features are defined as an array of four studs that protrude from the face of the front surface of the exterior of the Fabric Device and can be used for attaching a bezel or similar to the Fabric Device by mating a keyhole shape or similar with the protruding studs. Additionally, the Carrier Pin Hole on the front surface that may be used as a feature for locking a bezel or similar to the front surface.



5. Connector Mechanical Specification

5.1 Overview

The connector and pinout are defined in SFF-TA-1014 and SFF-TA-1015.

5.1.1 Connector Detail

The connector details defined in Figure 5-1, Figure 5-2, Figure 5-3, and Figure 5-4. Figure 5-1 shows one of the three datums (-C-) and the PCB relationship. The remaining figures show connector dimensional relationships as the connector starts and then completes full engagement.

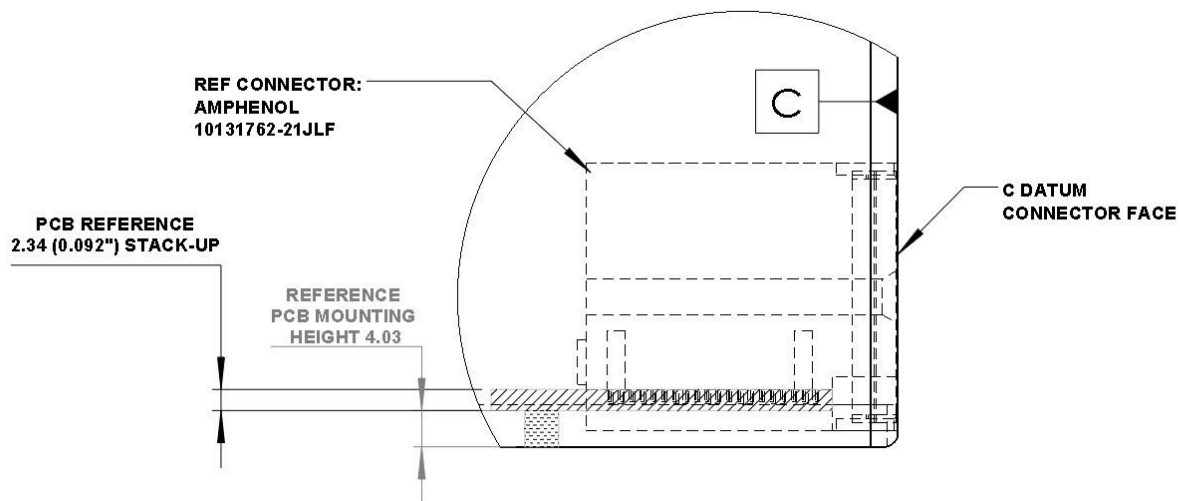


Figure 5-1 Connector Detail "D" (reference Figure 4-3)

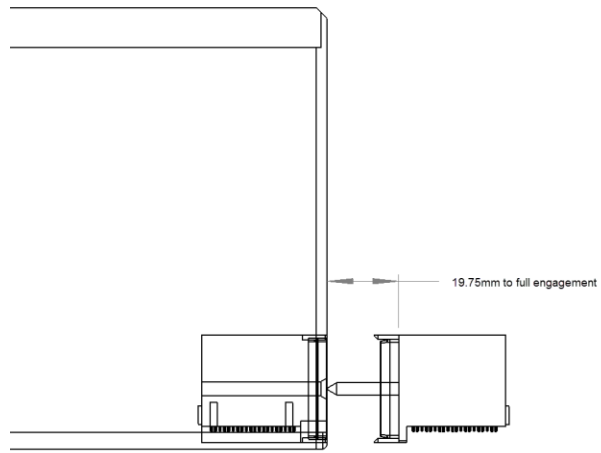


Figure 5-2 Initial Guide Pin Alignment

1
2
3

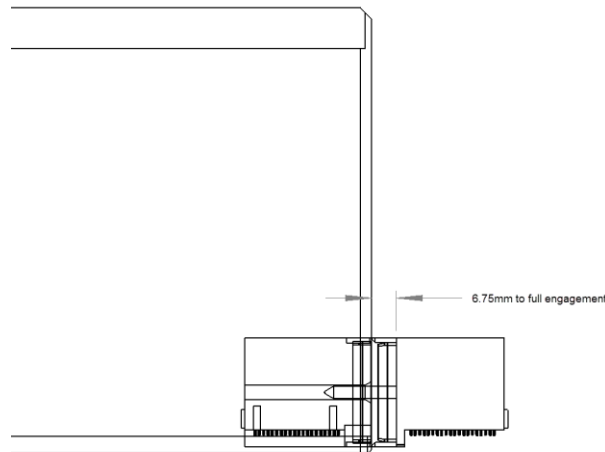


Figure 5-3 Initial Connector Guide Alignment

4
5
6

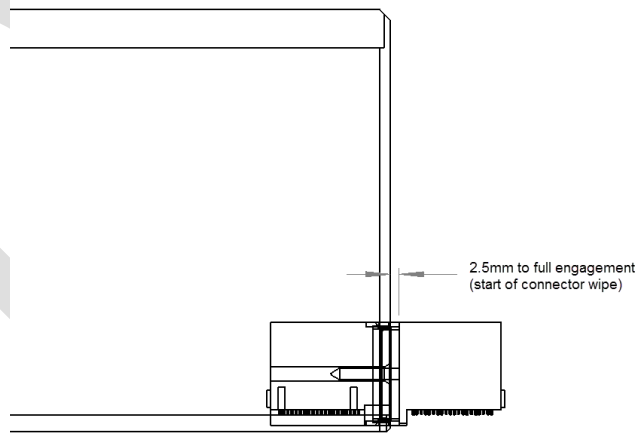


Figure 5-4 Initial Connector Contact (Start of Wipe)

7
8
9

1 **6. Thermal Design**

2 To create Fabric Devices that can operate within a common enclosure, similar cooling strategies must be used.
3 Airflow must flow into the front face and exhaust out the rear face (connector face). In addition, equivalent
4 pressure drop must occur to allow equal flow through all Fabric Devices.

5 **6.1 Maximum External Temperatures**

6 External surfaces of the Fabric Device shall not exceed 70°C according to UL 60950-1 (UL Information Technology
7 Equipment – Safety)

9 **6.2 Airflow Impedance Matching**


10 Proper impedance should be maintained to aid in the control the flow of air through an enclosure of multiple Fabric
11 Devices. This can be done by adding restrictions through the inner portions of the device, and/or restricting the
12 front and rear faces.

14 **6.2.1 Pressure / Impedance Drop**

15
16 The following equation can be used to define the expected impedance characteristics of a Fabric Device:

17
18 **Equation 1: Pressure = 60.6(Flow)²**

- 19 - Pressure (Pa)
- 20 - Flow (m³/min)
- 21
- 22

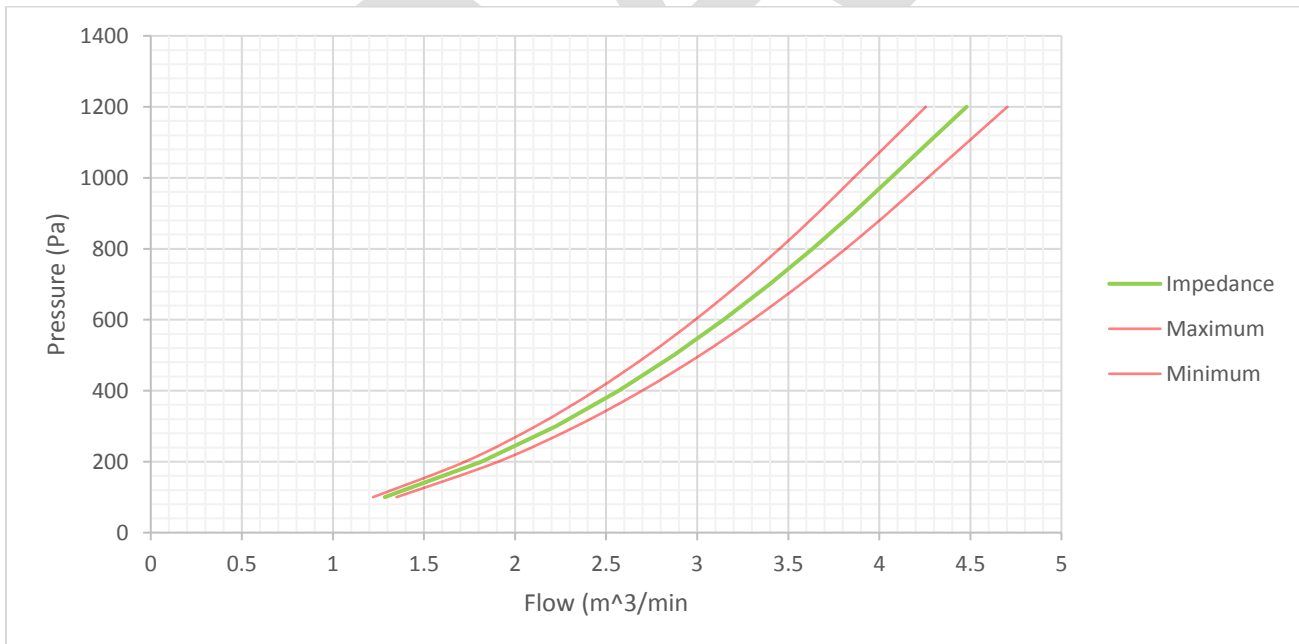

23 **Figure 6-1 - Fabric Device Impedance Curve**